



Features

- Aluminum alloy waterproof enclosure compliant IP-65
- Support Intel® ULV Celeron® M 1G processor
- Wide power input range
- -20 ~ 60 degree C Wide temperature operation
- Optional IP-67 AC/DC power adapter
- Standalone with wall-mount kit support
- DC 11~28V wide-range power input




Specifications

System	
Processor	Intel® ULV Celeron® M 1G
System Chipset	Intel® 910GML E + Intel ICH 6M
System Memory	1 x 200-pin DDR2 400/533 SO-DIMM up to 2GB
VGA	1 x VGA (IP-65 connector)
Ethernet	1 x LAN (IP-65 connector)
Solid Storage Disk	1 x 2.5" SATA HDD
Serial Port	1 x COM (IP-65 connector)
USB Port	1 x USB (IP-65 connector)
Power Input	DC 11~28V
LED Indicator	1 x power status
Watchdog Timer	1~255 seconds; up to 255 levels
OS Support	Windows® XP Pro, XP Embedded

Mechanical	
Construction	Aluminum die casting chassis (top cover : Heatsink design)
Color	Paint / Black
IP Rating	IP 65
Mounting	wall mount
Dimension	223(W)x146(D)x62(H)mm
Net Weight	2.1kgs

Power Adapter (APW-4206)	
AC input voltage range	AC 90 ~ 264V
Input frequency	47~63Hz
Output Current	5A
Efficiency	88%
Power Output	DC 12V, 60W

Dimension

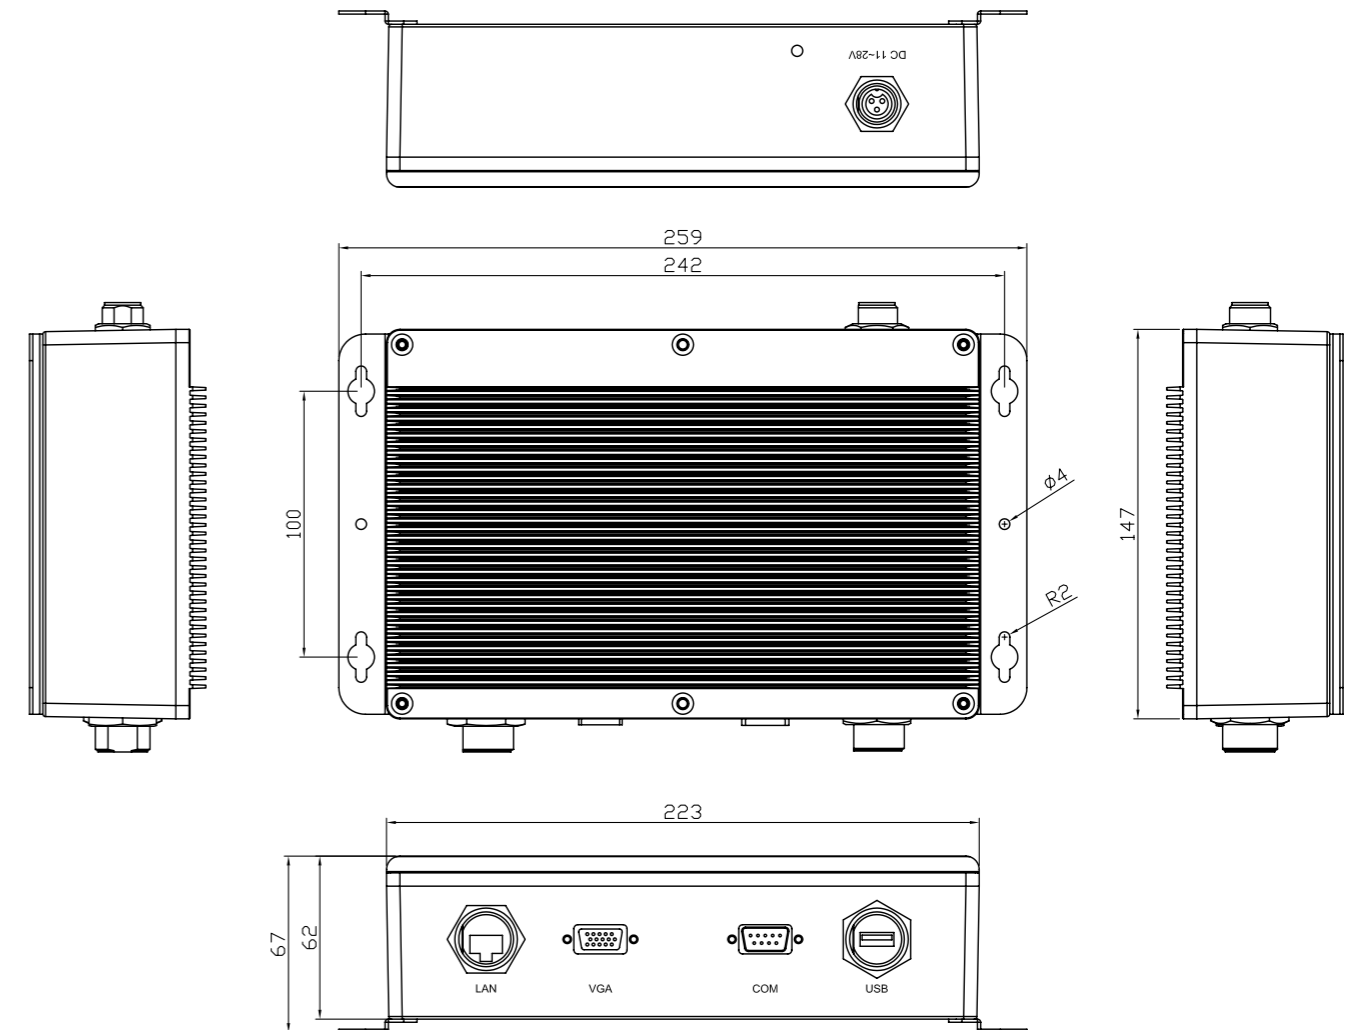

Environmental	
Operating Temperature	-20~60 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~95% @40 °C non-condensing
Certificate	Meet CE/FCC Class A

Ordering Information	
ACS-2701	IP 65 water-proof Embedded Controller
APW-4206	IP 67 water-proof 60W Power Adapter