

# ULOG485


USB Powered Type  
Monitored Interface Converter

Support two sets **RS232** to

**Ground isolated RS422/485** interface converter

Support four Monitored ports in one box

Powerful and Flexible for debug usage

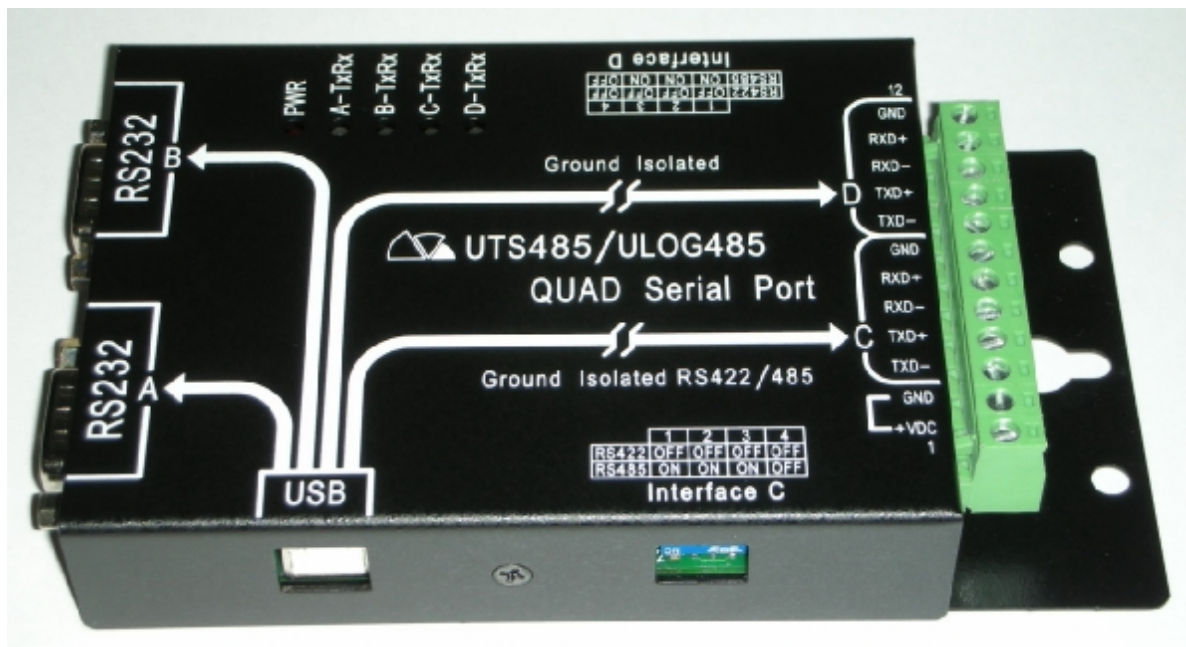

- ★ Support USB2.0 device controller
- ★ Support data transmission LED display for each port
- ★ Support two sets RS232 to Ground Isolated RS422 and RS485 selectable interface converter.
- ★ Support Auto Data Direction Control in RS485 interface
- ★ Support screw terminal in RS422/485 port
- ★ Support USB bus powered mode
- ★ Use MOSCHIP MCS7840 chip

## ULOG485 specifications :

<p><b>USB interface :</b></p> <ul style="list-style-type: none"> <li>☒ Connector type: USB B type connector.</li> <li>☒ Device Controller: USB 2.0</li> <li>☒ stream FIFO size: 512Byte per serial port.</li> </ul> <p><b>RS232 interface :</b></p> <ul style="list-style-type: none"> <li>☒ Connector type: DB9 male connector.</li> <li>☒ Number of ports: 2 (port A and B)</li> </ul> <p><i>NOTE: port A and B have same signal ground with power input from USB bus.</i></p> <p><b>RS422/485 interface:</b></p> <ul style="list-style-type: none"> <li>☒ Connector type: screw terminal block.</li> <li>☒ Number of ports: 2 (port C and D)</li> </ul> <p><i>NOTE: RS422 or RS485 interface type set by DIP switch.</i></p> <p><i>NOTE: terminator resistor insert or not set by DIP switch.</i></p> <p><i>NOTE: each port with isolated signal ground.</i></p> <p><i>NOTE: each port with 5 screw terminal signal pin TX+ , TX- , RX+ , RX- , isolated GND</i></p> <p><i>NOTE: In RS485 interface type support Auto-Data-Direction-Control feature. Data+ and Data- signal can be in TX+ and TX- pair or RX+ and RX- pair.</i></p> <p><i>NOTE: port A and port C is one set converter. port B and port D is one set converter.</i></p> <p><b>Power input :</b></p> <ul style="list-style-type: none"> <li>☒ USB powered mode.</li> <li>☒ Current consumption: 200mA.</li> </ul> <p><i>NOTE: user may use screw terminal block as 5V power input (OEM base).</i></p>	<p><b>LED indicator :</b></p> <ul style="list-style-type: none"> <li>☒ PWR: DC power input ON indicator.</li> <li>☒ A-TxRx: RS232 port A TXD/RXD signal activity.</li> <li>☒ B-TxRx: RS232 port B TXD/RXD signal activity.</li> <li>☒ C-TxRx: RS422/485 port C TXD/RXD signal activity.</li> <li>☒ D-TxRx: RS422/485 port D TXD/RXD signal activity.</li> </ul> <p><b>Accessories :</b></p> <ul style="list-style-type: none"> <li>☒ U101 cable: 6 feet USB A type to B type connector.</li> </ul> <p><b>Dimension :</b></p> <ul style="list-style-type: none"> <li>☒ ULOG485 box: 84mm (W) * 150mm (L) * 25mm(H)</li> </ul> <p><b>Environment :</b></p> <ul style="list-style-type: none"> <li>☒ operating temperature: 0°C to 55°C</li> <li>☒ operating humidity : 0% to 95% RH.</li> <li>☒ storage temperature : 0°C to 65°C .</li> <li>☒ storage humidity : 5% to 95% RH.</li> </ul> <div style="text-align: center;"> </div>
--	---

### Performance upgrade capability and relative products.

- ▲ TWIN485 box: two sets ground isolated RS232 to RS422/485 converter.
- ▲ P422I PCI PORT card: each card support two ground isolated RS422/485 ports.
- ▲ P485 PCI PORT card: each card support four ground isolated RS422/485 ports.

©All names are the trademarks of their respective organization.

	<p><b>RAYON TECHNOLOGY CO., LTD.</b></p> <p>2F, No. 177, Chung_Shan 2 Rd., Lu_Chou city, Taipei Hsien, Taiwan.</p> <p>TEL: 886-2-82858362 FAX: 886-2-82857065</p> <p>E-Mail: <a href="mailto:rayon@ms1.hinet.net">rayon@ms1.hinet.net</a></p> <p>WEB: <a href="http://www.computex.com.tw/rayon">http://www.computex.com.tw/rayon</a></p> <p>WEB: <a href="http://www.rayontech.com">http://www.rayontech.com</a></p>
--	---