

3U PXI/CompatPCI Peripheral Modules

cPCI-8211/8211R

3U PXI/CompatPCI Ethernet Module

- CompactPCI PICMG 2.0 R 2.1 compliant
- Built-in Intel 82559 LAN chip
- Supports 10/100Base-TX Ethernet standard
- IEEE 802.3u Ethernet Specification compliant
- Uses front panel RJ45 connector
- Rear I/O available on cPCI-8211R



cPCI-8212/8212R


3U PXI/CompatPCI SCSI Module

- CompactPCI PICMG 2.0 R 2.1 compliant
- SCSI-I, Fast SCSI, Ultra SCSI, Wide Ultra SCSI, Wide Ultra II SCSI
- Speed up to 80 MB/s in Wide Ultra II SCSI
 - External 68-pin SCSI-3
- Rear I/O available on cPCI-8212R

cPCI-8217/ 8217R

3U PXI/CompatPCI VGA/LCD Interface Module with Rear I/O Option

- SMI Lynx3DM SM721, VGA/ LCD controller with built-in 4 M V_{RAM}
- Switch for LCD backlight inverter on/ off
- Supports external CRT with front panel VGA connector
- Supports LCD with internal LCD connector and J2 rear I/O
- Hi-color display up to 1600x1200
- Rear I/O available on cPCI-8217R

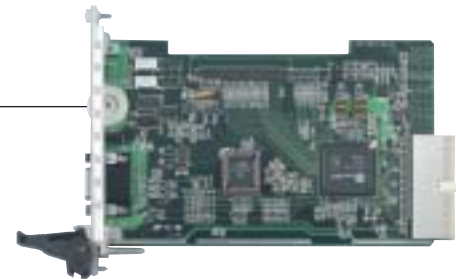

cPCI-8232/8232R


3U PXI/CompatPCI ATA-100 Interface Module with Rear I/O Option

- CompactPCI PICMG 2.0 R3.0 compliant, 32-bit/33 MHz
- Dual ATA-100 channels, supports up to 4 IDE devices
- Supports PIO Mode 0-4, DMA Mode 0-2, and Ultra DMA mode 0-5
 - One 40-pin IDE, one 44-pin IDE, and one Type-II CF socket
- Bootable from Windows NT or 2000 CDROM
- Rear I/O available on cPCI-8232R

cPCI-8273/8273R

3U PXI/CompatPCI 3-Port IEEE-1394 Interface Module with Rear I/O Option

- CompactPCI PICMG 2.0 R3.0 compliant, 32-bit/33 MHz
- Three IEEE-1394a ports, up to 400 Mbps for each port
- VIA VT6306 PCI 1394a controller
- Supports OHCI compliant programming interface
- Rear I/O available on cPCI-8273R

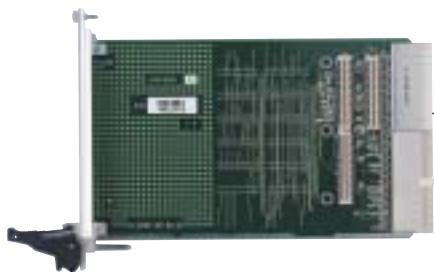

cPCI-8301

3U PXI/CompatPCI 64-Bit PMC Carrier Module

- CompactPCI PICMG 2.0 R3.0 compliant, 32-bit/33 MHz
- Single size PMC with 64-bit connector
 - IEEE P1386.1 compliant
- Up to 64-bit, 66 MHz PCI protocol
- Up to 7 cPCI-8301 devices in one PCI bus segment at 33 MHz, 2 devices at 66 MHz