

## Box PC Via C3

**With one free PCI or ISA-Slot**



### Features

**Dimension:** 217 x 300 x 74mm  
**System Board:** IT-3201M  
**CPU:** VIA C3 series  
Integrated with 125W ATX PSU  
**1 x PCI / ISA riser expansion (optional)**  
**Drive Space:** 1 x 3.5" HDD or 2.5" HDD  
**Expansion:** 1 x PCI / ISA

### Specifications:

#### Dimensions:

217mm (D) x 300mm (W) x 74mm (H)  
8.5" (D) x 11.8" (W) x 2.9" (H)

#### Weight:

Case only: 2.0Kg  
With Packaging: 3.1Kg

#### Material:

Front Panel: Aluminum  
Case Body: Metal – SECC 1.0mm

#### Expansion: (Optional)

One slot expansion for ISA or PCI application with riser card U-2035

#### Disk Drive Capacity:

One 3.5" (standard size) HDD or 2.5" slim HDD

#### Rear Window Opening Availability:

5 x 9-pin D-Sub COM ports  
2 x 25-pin D-Sub LPT ports  
1 x 15-pin D-Sub VGA ports  
1 x KB/Mouse port  
1 x RJ-45 Phone Jack port  
2 x USB ports

#### Paint Color:

Black

#### Controls:

Power On/Off switch

#### LED Indicator:

Power On/Off indicator  
HDD Active Indicator

#### EMC:

FCC, CE Compliant

#### Environment:

Operating Temperature: 0°C ~ 60°C  
Storage Temperature: -20°C ~ 70°C  
Relative Humidity: 10% ~ 90%

#### Form Factor:

5.25" SBC

#### Packaging Information:

2-In-1 carton packaging  
Internal carton: 39cm x 32cm x 18cm  
External carton: 40cm x 33cm x 43cm

#### Available 5.25" SBC System Boards:

- ENDAT-3201M-1R
- ENDAT-3201M-1i
- ENDAT-3201MF-1R
- ENDAT-3201MF-1i

## Box PC Via C3

### DC-DC converter: UN-802


- Output Rating: 80W (typical)
- Output Voltage:
  - +3.3V @ 9A
  - +5V @ 5A
  - +12V @ 3A
  - 12V @ 0.25A
  - +5Vsb @ 1.5A
- Input Voltage: 24V (DC)
- Input Current: 24V @ 5.0A (max)  
(DC18V-DC28V)

### Option:

**For desired CPU/RAM/HDD, please contact us before ordering**

UC-FTR    FAN Kit + Filter

## Board inside

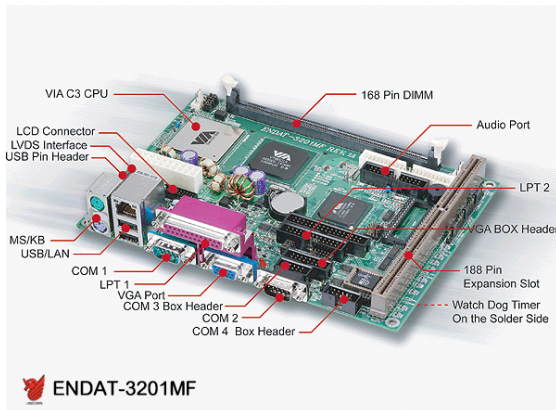

### Features:

- Onboard VIA C3/Eden series CPU
- 2D/3D VGA displa
- Support TFT (TTL or LVDS) LCD display
- 1 Realtek or Intel LAN
- 4 COMs w/ +5V, +12V power selector
- Support DOC 2000 + WDT
- Connectors onboard with reserved pin headers
- 203mm x 146mm / SBC

