

Postcard Size Box PC

IPC-BX/MSH3VS-CE300E



SH3/200MHz, 32MB memory, Windows CE3.00 English version

IPC-BX/MSH3WS-CE400E



SH3/200MHz, 32MB memory, XIP ROM 32MB, Windows CE.NET English version



IPC-BX/MSH3VS-CE300E




IPC-BX/MSH3WS-CE400E

Features

- Compact size (A6 paper size)
- 32MB memory standard
- 32MB XIP ROM (IPC-BX/MSH3WS-CE400E model only)
- Network (10BASE-T) capability standard
- 3-channel serial interface standard
- Card slots for function expansion
PCMCIA Type II: 1 slot, Compact Flash Type I: 1 slot
- 3 + 1 (XIP) types of boot device (using CONTEC original BIOS)
On-board Flash ROM boot: Can be used in stand-alone mode.
Network boot: Enables operating system and applications to be centrally managed from servers during development, etc.
ATA card boot: For easy switching of operating systems and applications. Can also be transferred to on-board flash ROM.
XIP boot: Boot from XIP ROM (IPC-BX/MSH3WS-CE400E model only)
- High-speed starting (IPC-BX/MSH3WS-CE400E model only)

Interfaces

IPC-BX/MSH3VS-CE300E

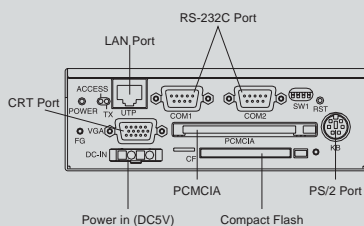


IPC - BX/MSH3VS-CE300E

Dimensions

(mm)

IPC-POA100SH (Power supply)

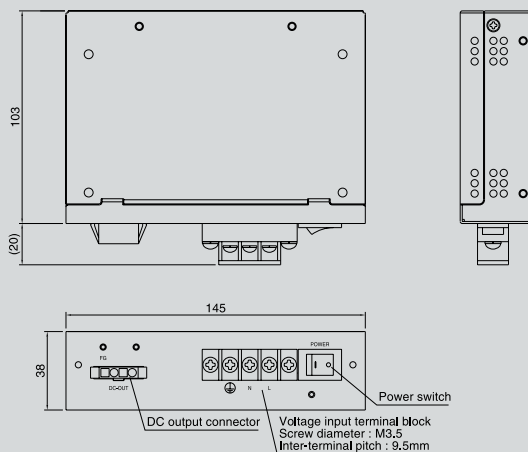

IPC - POA100SH (Power supply)