

# IAP-6701-WG+

## >> Industrial IP67 Outdoor 802.11 b/g with POE Access Point

- High Speed Air Connectivity: WLAN interface support up to 54Mbps link speed
- Highly Security Capability: WEP/WPA/WPA-PSK(TKIP,AES)/WPA2/WPA2-PSK(TKIP,AES)/802.1X Authentication supported
- Support AP/Bridge/Repeater/AP-Client Mode
- IP67 standard compliant
- Fully Compliant with IEEE802.3af POE specification
- Secured Management by HTTPs and SSH
- Event Warning by Syslog, Email, SNMP Trap, Relay and Beeper
- LLDP supported for topology view through Open-Vision
- Support 802.1x security and radius



### > Features

- WLAN interface supports up to 54Mbps link speed
- Various kinds of operation modes supported: AP/Bridge/Repeater/AP-Client mode
- Various kinds of encryption supported: WEP/WPA/WPA-PSK(TKIP,AES)/WPA2/ WPA2-PSK(TKIP,AES)/802.1X Authentication
- Environmentally sealed by IP67 grade protection and ultrarugged enclosure fir toughest industrial usages
- Wireless connecting status monitoring
- Versatile modes & event alarm by e-mail
- HTTPs & SSH protocol supported for secured management
- IP table to prevent access from unauthorized IP address
- IP Configurable by Windows utility (AP-Tool)

### > Introduction


IAP-6701-WG+ is a reliable IP67 outdoor 802.11b/g WLAN Access Point with 1 POE P.D Ethernet port. It can be configured to operate in AP/Bridge/Repeater/AP-Client mode. It is specifically designed for the toughest industrial environments. In combination with its IP67 design and the superb management functionality. IAP-6701-WG+ provide a waterproof, and dust-tight connection. You are able to configure IAP-6701-WG+ by WEB interface via LAN port or WLAN interface. In addition, IAP-6701-WG+ also provides PD feature which is fully compliant with IEEE802.3af P.O.E. PD specification to save the layout cost of power line. The IAP-6701-WG+ can be easily adopted in almost all kinds of applications and provides the most rugged solutions for managing your network in outdoor. Therefore, IAP-6701-WG+ is one of the best outdoor communication solutions for wireless applications.

### > Application


In practical operation of outdoor wireless access point, Windows utility (AP-Tool) is supported. This utility is very helpful for you to search and configure IP of access point on the industrial network.

In addition, the outdoor wireless access point support various kinds of operation modes include AP/ Bridge/Repeater/AP-Client mode. IAP-6701-WG+ also support PoE PD feature to extend the layout up to 100 meters. You can build up the wireless network easily.

## Various Kinds of Operation Modes

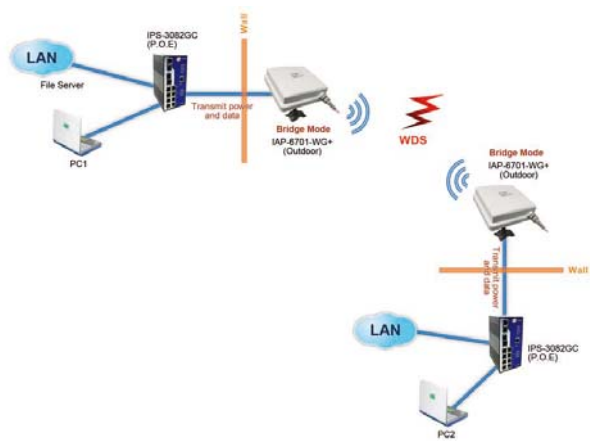


Operation Mode – Bridge Mode

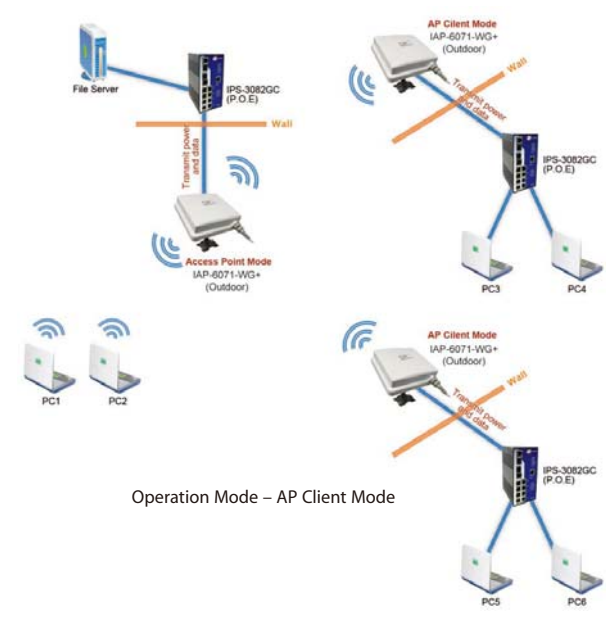

Operation Mode – AP Client Mode




Operation Mode – Access Point Mode

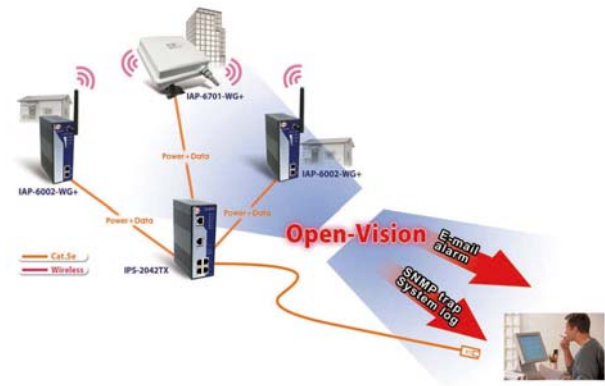

Link Monitor and alarm

### > Dimension

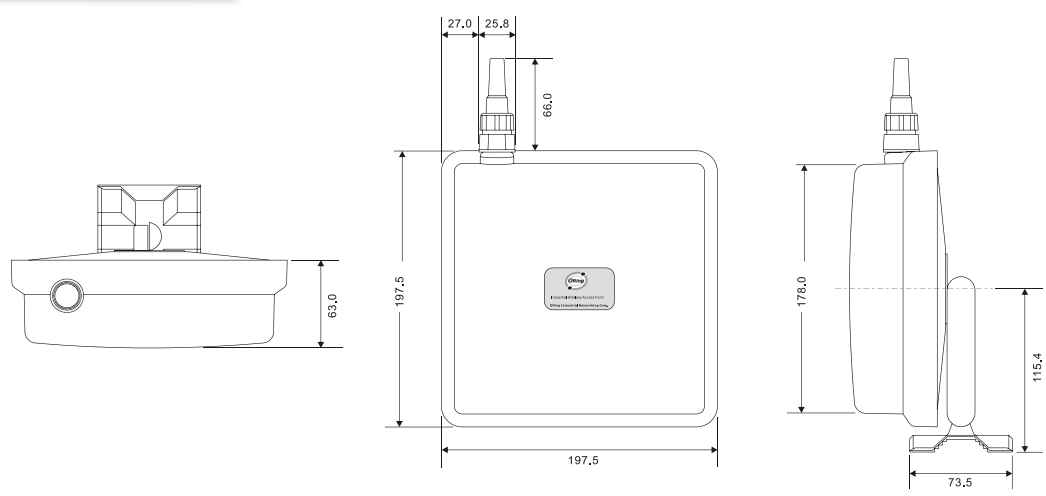

Unit=mm

> Specifications

ORing WLAN Access Point Model	IAP-6701-WG+
<b>Physical Ports</b>	
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX with POE PD	1 Fully compliant with IEEE 802.3af Power Device specification Over load & short circuit protection Isolation Voltage: 1000 VDC min. Isolation Resistance : 108 ohms min
<b>WLAN interface</b>	
Operating Mode	AP/Bridge/Repeater/AP-Client
Antenna Connector	Housing
Radio Frequency Type	DSSS
Modulation	IEEE802.11b: CCK, DQPSK, DBPSK IEEE802.11g: OFDM with BPSK, QPSK, 16QAM, 64QAM
Frequency Band	America/FCC: 2.412~2.462 GHz (11 channels) Europe CE/ETSI: 2.412~2.472 Ghz (13 channels)
Transmission Rate	IEEE802.11b: 1/ 2/ 5.5/ 11 Mbps IEEE802.11g: 6/ 9/ 12/ 18/ 24/ 36/ 48/ 54 Mbps
Transmit Power	IEEE802.11b/g: 18dBm
Receiver Sensitivity	-81dBm @ 11Mbps, PER< 8%; -64dBm @ 54Mbps, PER< 10%
Encryption Security	WEP: (64-bit ,128-bit key supported) WPA: WPA2 :802.11i(WEP and AES encryption) PSK (256-bit key pre-shared key supported) Radius supported TKIP encryption
Wireless Security	SSID broadcast disable
<b>Power</b>	
Input power	48 VDC from P.o.E
Power consumption (Typ.)	6 Watts
<b>Physical Characteristic</b>	
Enclosure	IP-67
Dimension (W x D x H)	196(W)x60(D)x196(H) mm ( x x inch.)
Weight (g)	1040 g
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-10 to 55°C (14 to 131°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory approvals</b>	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950
<b>Warranty</b>	3 years

> Ordering Information

IDS-67AA BB C

Code Definition	LAN Port Number	WLAN Identification	POE Identification
<b>Option</b>	- 1: 1 port	- <b>WG</b> : IEEE802.11 b/g mode	- "+" : P.O.E. PD present

Available Model	Model Name	Description
	IAP-6701-WG+	Industrial IP67 Outdoor 802.11 b/g with POE Access Point