


# **A1016** Advanced PCIe card

**Support 16 RS232 Ports**

**Support PCIe slot**

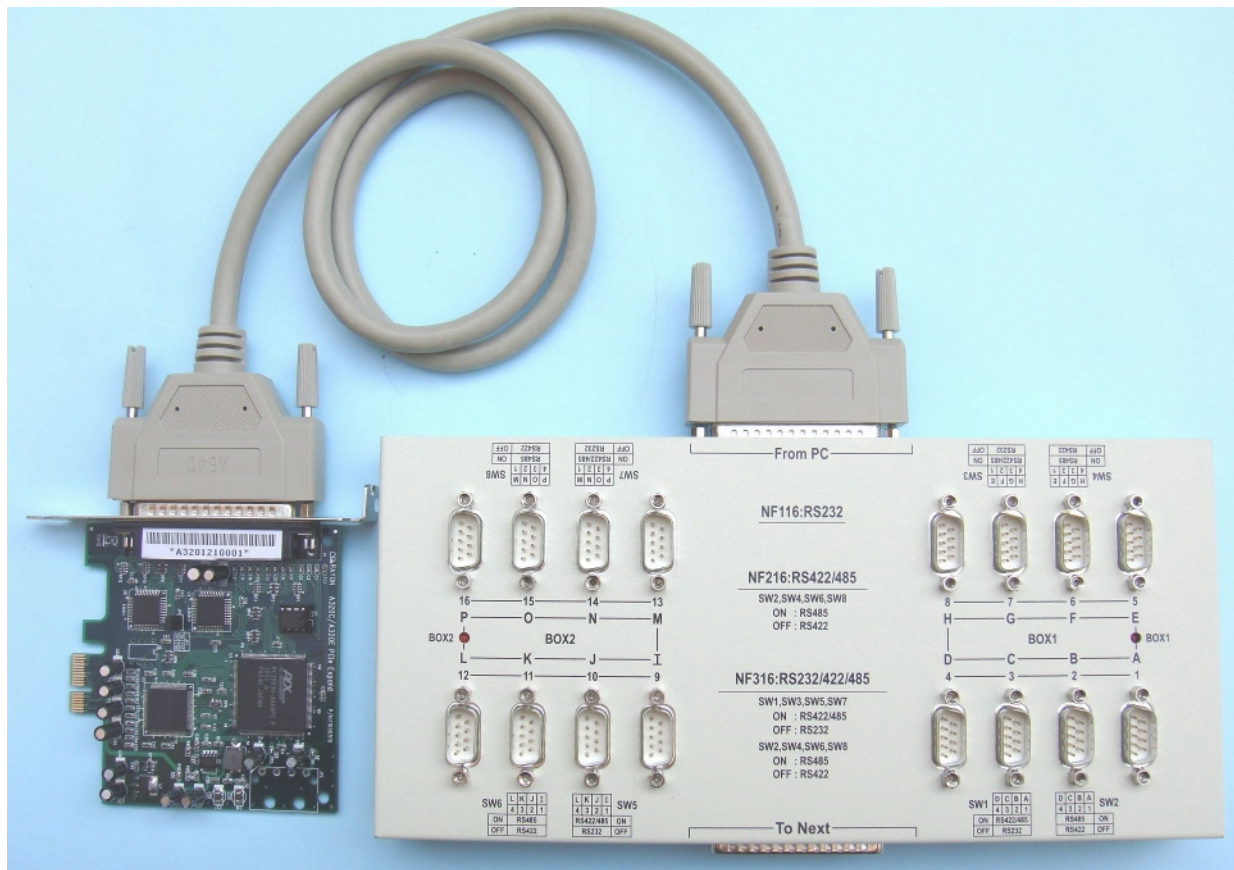

- ★ Support 16 RS232 serial ports in one PCIe slot.
- ★ Just one IRQ for 16 ports.
- ★ Support Windows 95/98/Me system driver.
- ★ Support Windows NT/2000/XP/Vista system driver.
- ★ Support Windows 7 system driver.
- ★ Support Linux and SCO Openserver System driver.
- ★ Support card and metal box structure.

## ***A1016 specification:***

### **System structure:**

- ▲ A320 intelligent multi-port card.
- ▲ NF116 connector box.
- ▲ A640 cable.

### **System resource and IRQ map:**

- ▲ Memory map model:
  - \* 128Byte for PCI controller.
  - \* two 4Kbyte for UART controller.
- ▲ I/O map model:
  - \* 128Byte I/O for PCI controller.
  - \* 256byte I/O for UART controller.
  - \* 64byte I/O for status register.
- ▲ one free IRQ assigned by PCI BIOS.

### **Hardware compatibility:**

- ▲ PCIe bus slot.

### **Software compatibility:**

- ▲ WIN 95/98/Me. (I/O map model only).
- ▲ Windows NT system.
- ▲ Windows 2000/XP/Vista system.
- ▲ Windows 7 system.
- ▲ SCO Openserver
- ▲ Linux system.

### **Port capability :**

- ▲ A320 card with one NF116 box can support 16 RS232 serial ports.

### **BOX specification.**

#### **Interface: :**

- ▲ NF116 box: RS232C compatible.  
16 ports per box.

#### **Baud Rate: :**

- ▲ each port can be configured to 110 - 115200bps.  
Note: In UNIX system we use 50bps, 75bps, 150bps to set the target speed 57600bps, 76800bps and 115200bps.

#### **Flow Control: :**

- ▲ XON/XOFF software handshake.
- ▲ RTS/CTS hardware handshake.

#### **Connector type :**

- ▲ NF116 box: DB9 male connector.

#### **Dimension :**

- ▲ card: 10.0 \* 9.5 cm.

#### **Environment :**

- ▲ operating temperature: 5°C to 40°C.
- ▲ operating humidity: 10% to 90% RH.
- ▲ storage temperature: 0°C to 65°C.
- ▲ storage humidity: 5% to 90% RH.

## **Other relative products.**

- ▲ user can use P640NU card in PCI slot and use same connector box.
- ▲ P990F card: built-in 80960JF local processor.
- ▲ IOP3927F card: built-in 133MHz MIPS local processor.

\* All names are the trademarks of their respective organizations.



### **RAYON TECHNOLOGY CO., LTD.**

2F, No. 177, Chung\_Shan 2 Rd., Lu\_Chou city, Taipei Hsien, Taiwan.

TEL: 886-2-82858362 FAX: 886-2-82857065

E-Mail: [rayon@msl.hinet.net](mailto:rayon@msl.hinet.net) or [info@rayontech.com.tw](mailto:info@rayontech.com.tw)

WEB: <http://www.computex.com.tw/rayon>

WEB: <http://www.rayontech.com>